



DATA SHEET

Flotex - Metro Neon Carpet Tiles

issue 08/18

pg 1/2

Distributor/Manufacturer

Advance Flooring Systems Limited/Forbo Flooring Systems

Trade Name

Flotex - Metro Neon

Product Description

100% Nylon 6,6 flocked fibre carpet tiles with a PVC backing system.

Product Benefit

Flotex Metro Neon is a sustainably manufactured carpet tile with excellent slip resistance providing you a safe highly durable carpet tile that is easy to clean.

Area of Application

Flotex Metro Neon is suitable for use in any high traffic commercial areas.

Composition

Flotex Metro Neon carpet tiles are made with a dye injected flocked nylon construction consisting of 100% Nylon 6,6 bonded to a fiberglass reinforced PVC backing system. Flotex tile has approx. 67% recycled content by weight.

Dimensions

Total height	5.3mm
Density	Over 70 million fibres p/M ²
Tile size	500 x 500mm

Pattern & Colours

Structured organic pattern available in a range of 37 colours.

Manufacture

Flotex Metro Neon carpet tiles are manufactured by Forbo Flooring Systems using manufacturing processes that are ISO 14001:2004 compliant for its Environmental Management Systems.

Smoke/Fire

Flotex Metro Neon carpet tiles comply by exceeding the NZ requirements.

Electrical Resistance

Flotex Metro Neon carpet tiles comply by exceeding the NZ requirements.

Durability

Class 33, Heavy Commercial



DATA SHEET

Flotex - Metro Neon Carpet Tiles

issue 08/18

pg 2/2

Sound Absorption

Flotex carpet tiles systems can reduce impact noise by up to 17 dB.

UV Resistance

Some fading may be observed in areas of intense sunlight.


Sustainability

Forbo Flooring Systems is committed to the protection of the environment and all products are manufactured to strict ISO 14001: 2004 standards. Flotex carpet tiles are certified to be Global GreenTag scheme standard – Green Rate level A.

Installation

Flotex Metro Neon carpet tiles must be installed by a competent and experienced carpet installer and we recommend the full stick method - more information on the recommended installation procedures is available on our website www.advanceflooringsystems.com or upon request.

We recommend the following installation method for Flotex Metro Neon

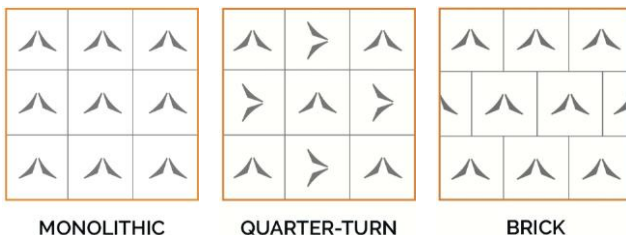

MONOLITHIC

QUARTER-TURN

BRICK

Recommended Adhesive

Strongbond 65 – Look Floors, Polymer 999 PS – Gilt Edge Industries Ltd & Mapei Ultrabond Eco Fix.

Cleaning and Maintenance

Proper maintenance is one of the most important factors to ensure good performance of carpet. When possible Metro Neon should be vacuumed daily. In the first instance, a good entrance matting system installed at entry areas will help collect up to 90% soiling before it is tracked into the interior of the building - more information on the recommended maintenance procedures is available on our website www.advanceflooringsystems.com or upon request.

Warranty

The manufacturer warrants the product for ten (10) year for material and manufacturing defects from date of installation. The manufacturer further warrants the product will not require replacement due to normal wear and tear within the specified 10-year period. Further details are available upon request.

Advance Flooring Systems Ltd

email: info@advanceflooringsystems.com

www.advanceflooringsystems.com

Call us: **0508 238 262**


Advance
FLOORING SYSTEMS